


Fluke 9062

Motor & Phase Rotation Indicator

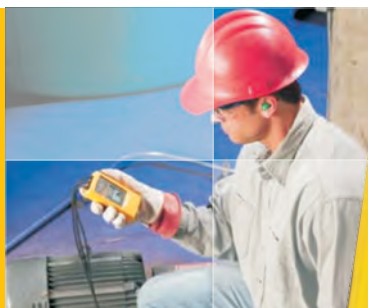

Unique phase rotation indicator with motor rotation ability

The Fluke 9062 Motor and Phase Rotation Indicator is a portable, handheld instrument designed to detect the rotary field of three-phase systems and motor direction. And without hooking up test leads, you can determine the rotation of a motor by holding the tester above the motor in line with the shaft. Like other tools that you have come to expect from Fluke, the 9062 is rugged, reliable, and easy to use. If you frequently work on motors, this tester is a must have for your tool belt.

Specifications

Environmental	
Operating Temperature	0°C to +40 °C (32 °F to 104 °F)
Operating Altitude	2000 m (1.2 miles)
Pollution Degree	2
Type of Protection	IP 40
Determine rotary field direction	
Nominal Voltage Rotary Direction	1 to 400 V ac
Nominal Voltage Phase Indication	120 to 400 V ac
Frequency Range (fn)	2 to 400 Hz
Test Currents (In per phase)	less than 3.5 mA
Determine the motor connection	
Nominal Test Voltage (Ume)	1 to 400 V ac
Nominal Test Currents (In per phase)	less than 3.5 mA
Frequency Range (fn)	2 to 400 Hz
Warranty	2 years
Electrical specifications	
Battery	9 V alkaline, IEC 6LR61
Current Consumption	max 20 mA
Battery Life	minimum 1 year for average use



FLUKE®

Accessories

Fluke LVD2 Volt Light



Non-contact AC voltage detector and LED flashlight combined into one easy to use pen-style design.

- Dual Sensitivity
- LED light with 100,000 hour life
- Detects from 90 to 600 V AC
- Rated to CAT IV 600 V
- Dual Levels of Detection
- Operating temperature 0° C to 50° C
- Ultra-Bright White LED
- 100,000 hr bulb
- AAA battery included

Fluke TL75 Hard Point^a Test Lead Set



- One pair (red, black) of comfort grip probes with PVC insulated, test leads with right-angle shrouded banana plugs
- Recommended for general purpose measurements

Fluke i1010/i410 AC/DC Current Clamp



- Battery powered Hall-effect probe measures 1 A to 400 A (Fluke i410)
- Battery-powered Hall-effect probe measures 1 A to 1000 A (Fluke i1010)
- 1mV/Amp output guarantees easy reading on your meter
- Take accurate current readings without breaking the circuit
- CAT III 600 V Safety rating (Fluke i410)
- Also available with softcase for DMM and clamp (i410 kit)

Fluke Fuse for Fluke 115 (803293)



"High-energy" fuses designed to keep the energy generated by electrical short within the fuse enclosure, protecting the user from electric shock and burn.

Fluke ToolPakTM Magnetic Meter Hanging Solution



- Kit includes universal hanger clips (2), hook & loop straps (2 lengths) and strong magnet
- Combine components to meet most hanging needs
- Attaches to back of a 110/170/180 Series meter, 20/70-III with integrated Holster (with adapter), 724/725 and 50 Series II